

**Securex ProSuper : welded mesh panel system**

**FENCING**

With the SucurexProSuper, you can be assured that your school, park and commercial property will be fully protected against unwanted visitors.


This new generation fencing system takes site protection to higher levels of luxury and appeal. It boasts a stunning and dynamic look with the "V-shaped" pressings along each panel. Its product features don't finish there. Constructed from the highest specification materials, the "ProSuper" offers a tamper resistant fixing system and can be customised with a matching gate. With all of these features packed into a system its no wonder the SucurexProSuper is set to become a favourite among customers...



**Key Features**

- A robust and aesthetically pleasing welded mesh panel system suited to a variety of applications (e.g. schools, parks, domestic and commercial properties)
- V-shaped pressings along each panel provide increased lateral rigidity
- Panels are secured to post with tamper resistant fixings
- Available with a height of 2030mm or 2430mm
- Matching single or double swing gates available
- Supplied in a Green RAL 6005 or Black RAL 9005 finish. Other colours available upon request

FENCING

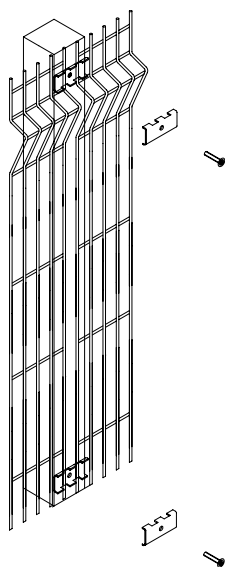

Fence Type	Height (nom.)	Wires V/H*	Mesh Size	Width	Panel lifts	Panel Weight	Post Lgth	Post dimension
ProSuper	2000mm	5/5mm	200 x 30mm	3000mm	Single	40kgs	2700mm	60 x 60 x 2mm
ProSuper	2400mm	5/5mm	200 x 30mm	3000mm	Single	49.5kgs	3100mm	60 x 60 x 2mm

\*V= Vertical H= Horizontal

**Mesh**

**Wire:** 5mm vertical, 5mm horizontal  
**Mesh size:** 200mm x 30mm  
**Width:** 3000mm  
**Actual Height:** 1975mm and 2460mm  
**Profiles:** 78mm wide horizontal beam (4 no. for 2400m high, 3 no for 2000mm high)

**Fixings**

Individual clamp fixings  
**Bolts:** Anti-vandal pin hex M8 x 40mm (sheerline available on request)  
**Fixings:** Threaded inserts set at 400mm max.

**Posts**

**Construction:** Rectangular Hollow Section  
**Finish:** Galvanized and polyester powder coated.  
**Post centres:** 3018mm  
**Post Caps:** Plastic (welded steel available on request)  
**Baseplates:** Not supplied as standard  
**Post Dimensions:** See table

**Post Options**

- Baseplates
- Wall Mounting Plates
- 90 degree cranks to go over walls
- Cranks or straight extensions to receive barbed or razor wire

**Gates**

- Single or double swing
- Cantilever of tracked sliding gates
- Manual or powered opening available with a choice of entry control options
- Cladding: Mesh or vertical bar

**Finish**

- Galvanised and polyester powder coated Green RAL 6005 or Black RAL 9005
- Other RAL colours available on request.

**Installation**

**Post centres:** 3018mm  
**Concrete:** Minimum half depth  
**Panels:** Set at maximum 50mm above ground level  
**Slopes:** Step panels and cut or add additional posts as necessary

RAL 9005	RAL 7073	RAL 5010	RAL 9010	RAL 6005	RAL 3000	RAL 1005	RAL 8019
----------	----------	----------	----------	----------	----------	----------	----------

**Working with you - the complete service**

All products are manufactured and guaranteed to current BS and EN standards. We are able to offer design services, technical support and site visits. Installation advice and technical drawings are available on request. All quotations, advice and site visits are carried out free of charge. All products are supplied subject to our terms and conditions of sale.